




ST48-S



**Intertek**  
 Conforms to ANSI/UL STD 471  
 Certified to CSA STD  
 C22.2 No. 120

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Deep-Well Slide Top Coolers

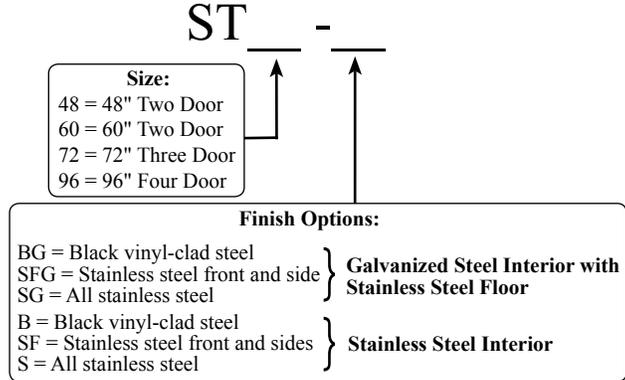

### Standard Features

- Meets 2008 energy efficiency standards
- Self-contained refrigeration
- Automatic defrost cycle
- Radius interior corners for easy cleaning
- Perfect exterior dimensions: 24" front to back and 48", 60", 72", or 96" left to right
- Foamed-in-place insulation, CFC free
- Two interior options: galvanized steel walls and stainless steel floor or all stainless steel
- Three exterior options: black vinyl-clad steel, stainless steel front & sides, or all stainless steel
- Six foot grounded cord & plug included (exits left rear)
- Optional 3-3/4" casters or 6" legs are available
- Automatic condensate evaporator - no drain connection required
- One-piece integral top and mullion design
- Door locks

### Specifications

- Electrical**
- 120V, 1 phase, 60 Hz
  - ST48 - 5.8 full load amps
  - ST60, ST72, ST96 - 6.5 full load amps
  - Dedicated 15 amp circuit is recommended
  - Includes a 6-foot grounded cord & plug which exists the left rear of the refrigeration compartment
- Refrigeration**
- 1/4 HP, R134a refrigerant
  - Operating range: 30°F (-1°C) to 40°F (4°C)
  - Fin & tube evaporator with forced air circulation
- Plumbing**
- Automatic condensate evaporator. No drain connection required
- Partitions**
- ST48 includes three vertical wire partitions
  - ST60 includes three vertical wire partitions
  - ST72 includes four vertical wire partitions
  - ST96 includes five vertical wire partitions
- Capacity**
- 48" model = 327 long neck bottles (13.63 cases)
  - 60" model = 475 long neck bottles (19.82 cases)
  - 72" model = 594 long neck bottles (24.75 cases)
  - 96" model = 772 long neck bottles (32.17 cases)
- Legs**
- Optional 6" legs, specify accessory #STLS-4 (ST48) or #STLS-6 (ST60, ST72, ST96)
  - 1-5/8" diameter
  - Stainless steel bullet feet
- Materials**
- 20 gauge stainless steel series parts include: top, door, interior floor, back\*, front\*, and sides\* (\*if all stainless finish is specified)
  - 20 gauge black vinyl-clad steel parts include: front and sides (if black vinyl-clad steel body finish is specified)
  - 22 gauge stainless steel parts include: interior walls (if stainless interior is specified)
  - 22 gauge galvanized steel parts include: interior walls (if galvanized steel interior is specified) and back
  - 16 gauge stainless steel parts include: legs\* (\* if specified)
  - 16 gauge galvanized steel parts include: base

<b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
-------------------------------------------------------------------------------------------------------------------------------------------------	-----------------



Specifications subject to change without notice. For current specifications please visit our website.

# Deep-Well Slide Top Coolers

## Dimensional Information

Model	A	B	C	No. of Doors
ST48	48"	39"	31"	2
ST60	60"	39"	43"	2*
ST72	72"	63"	55"	3
ST96	96"	87"	79"	4

\*NOTE: The ST60 has one large door and one standard door

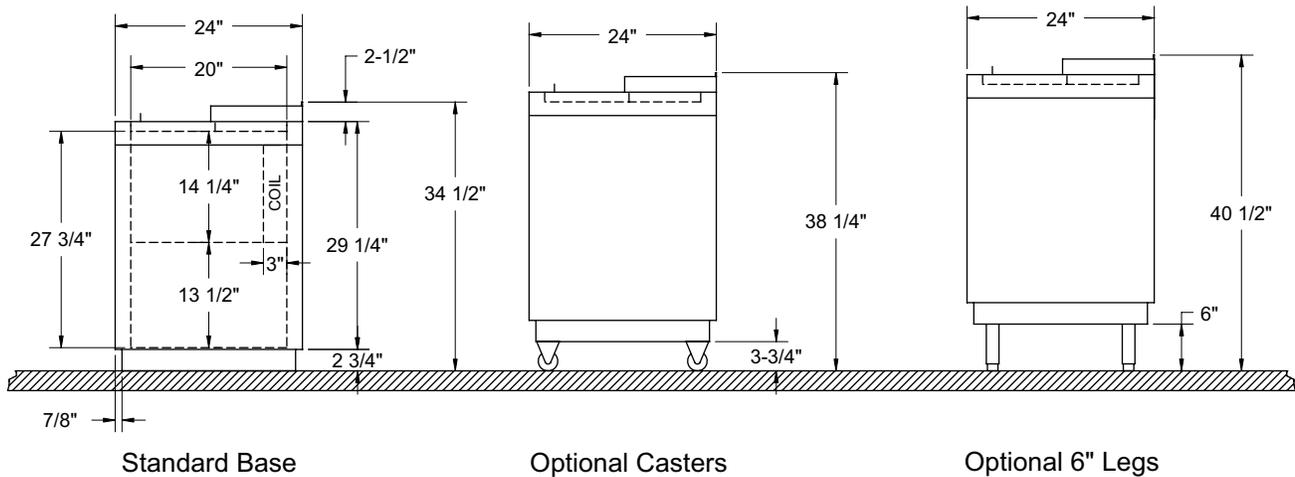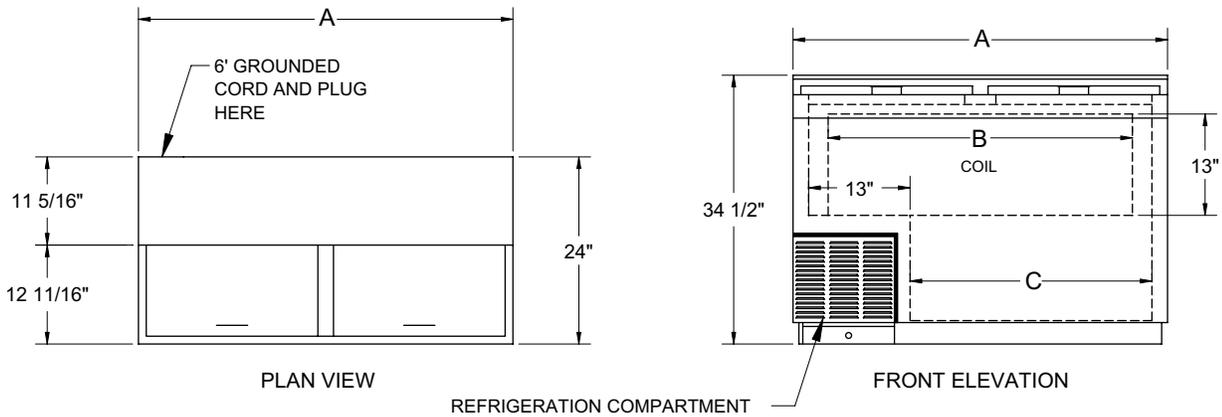

TYPICAL END VIEWS