


## Heavy-gauge utility or corner angle.

- Standard leg sizes are 2"x2", and 3"x3".
- Wider and uneven leg sizes available.
- Available in 18, 16, 14 and 12 gauge.
- Standard 10' lengths. Other lengths available on request.

Dietrich heavy-gauge corner angle is commonly used for a variety of applications including: concrete pour stop, connection strut or angle, roof ridge angles and corner reinforcement.



Corner Angle

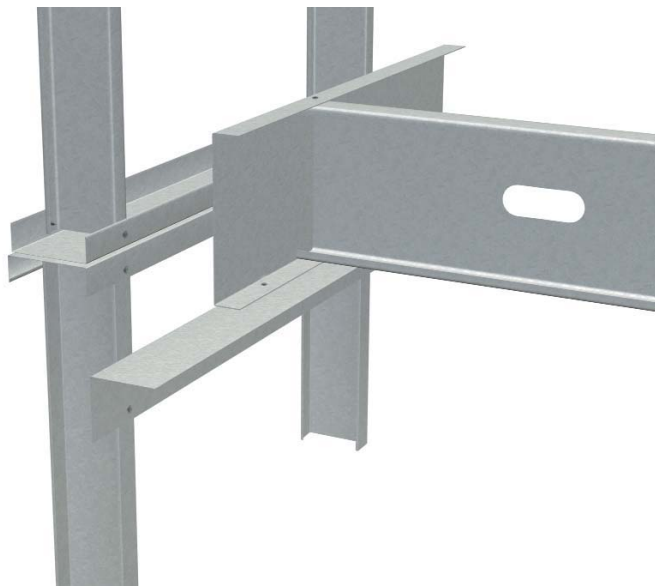

Corner Angle (CAM)

### Corner Angle (CAM)

DMF Product Code	Thickness				Size*		Length*		Weight		Packaging
	Gauge	Mils	Design Thickness		Inches	mm	ft	m	lbs/ft	kg/m	Pcs/Skid
			Inches	mm							
CAE	20	33	0.0346	0.879	2 x 2	50.8 x 50.8	10	3.05	0.470	0.699	500
CAM	18	43	0.0451	1.146	2 x 2	50.8 x 50.8	10	3.05	0.620	0.922	250
	16	54	0.0566	1.438	2 x 2	50.8 x 50.8	10	3.05	0.770	1.141	250
	14	68	0.0713	1.811	2 x 2	50.8 x 50.8	10	3.05	0.980	1.453	250
	12	97	0.1017	2.583	2 x 2	50.8 x 50.8	10	3.05	1.400	2.076	250
CAE	20	33	0.0346	0.879	3 x 3	76.2 x 76.2	10	3.05	0.680	1.010	500
CAM	18	43	0.0451	1.146	3 x 3	76.2 x 76.2	10	3.05	1.020	1.515	250
	16	54	0.0566	1.438	3 x 3	76.2 x 76.2	10	3.05	1.290	1.915	250
	14	68	0.0713	1.811	3 x 3	76.2 x 76.2	10	3.05	1.530	2.270	250
	12	97	0.1017	2.583	3 x 3	76.2 x 76.2	10	3.05	2.140	3.175	250

\*Other sizes available on request.